
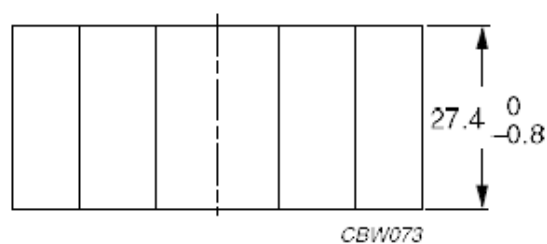


Core E 65/32/27

Effective core parameters

$\Sigma I/A$	0,274	mm ⁻¹
Ie	147,00	mm
Ae	540,00	mm ²
Amin	530,00	mm ²
Ve	79000	mm ³

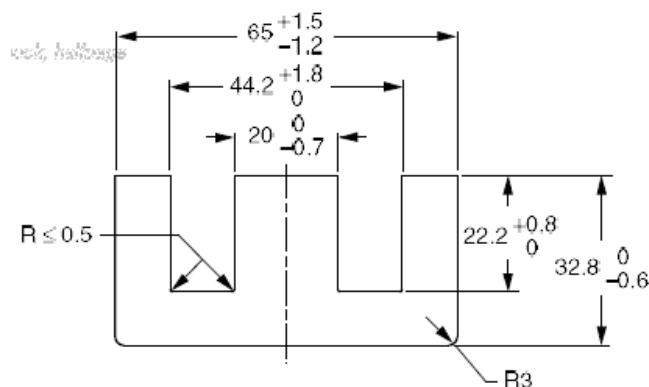

E cores are mainly used in power transformers. Below are examples of cores materials we use for the manufacture of our products. These cores occur with different slots and AL values. AL values are given for cores without slots. For our production we also use cores with different slots of different constant AL eg: 630, 400, 315, 250, 160, 100 as well as other made according to individual customer requirements.

The examples of used materials

Material	AL [nH]
3C90	8600 ±25%
3C92	6000 ±25%
3C94	8600 ±25%
3C95	10600 ±25%
3F3	7300 ±25%
N27	7200+30/-20%
N87	7900+30/-20%
F-867	8000 ±25%
F-887	7800 ±25%