


Core U21/16/7

Effective core parameters

$\Sigma l/A$	1,29	mm^{-1}
I_e	70,0	mm
A_e	54,0	mm^2
V_e	3814	mm^3

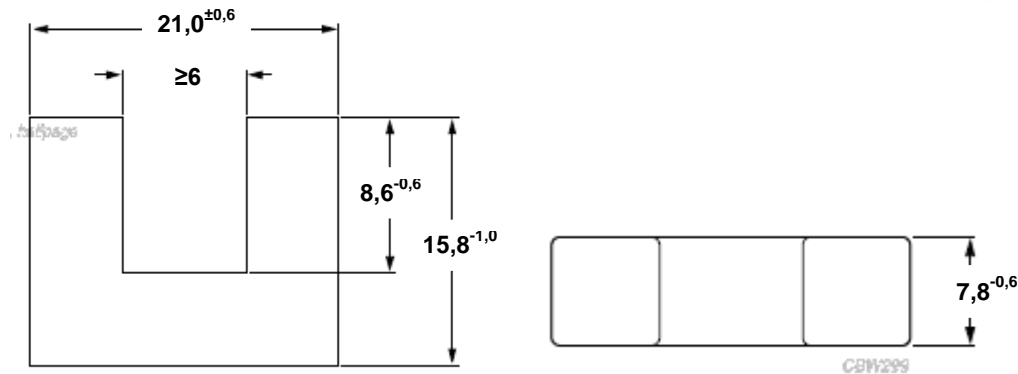

Depending on the perform of U cores, they can be used in interference suppression filters of power supplies as well as in other electronic systems requiring constant inductance over a wide range of currents. In addition, they can also be used in ignition systems in the automotive industry.

Below are examples of core materials we use for the manufacture of our products. These cores there may be different slots and AL values. Set consists of 2 pieces of cores without slot or with slot according to customer requirements.

The examples of used materials

Material	AL [nH]
F-867	1700 ±25%
F-887	1650 ±25%